

# TERRAWEAVE

## NATURAL TIMBER ACOUSTIC PANELS

**Terraweave timber acoustic panel** is made of sustainable cotton wood fibre, cement and minerals under high temperature and high pressure. There are countless pores within the panel which absorbs sound. Not only does it have great acoustic and impact resistant properties it is also environmentally and human friendly. Different painted colors are available by request.



### Specifications:



1mm wool width





1.5mm wool width

Material:	Wood fibre & inorganic cement
Standard sizes:	1220mm x 2440mm, 1200mm x 600mm, 600mm x 600mm
Standard thickness:	15mm, 20mm, 25mm
Edge detail:	Square or bevelled edge
Colours:	Original colour / PU painting
Wool width:	1.0/1.5mm
Fire:	AS5637.1 GROUP 1
Density (Kg/m <sup>3</sup> ):	300 - 330
Thickness Expansion: (immersion in water 24hrs)	<2%

### Features:

Natural raw materials:	Wood fibre & inorganic cement
Good sound performance:	NRC up to 0.85
Moisture proof:	Can be used in up to 90% humidity
Heat resistance:	Temperatures up to 200 degrees

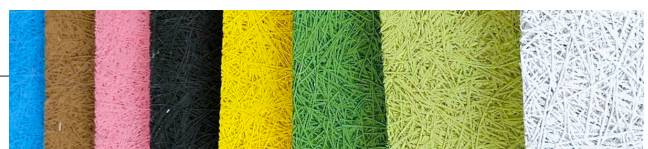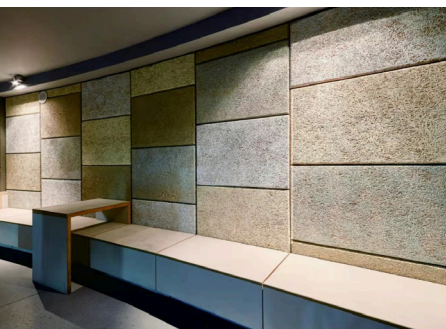


# TERRAWEAVE

## NATURAL TIMBER ACOUSTIC PANELS


### Colour Specifications:



### Matching screws available:

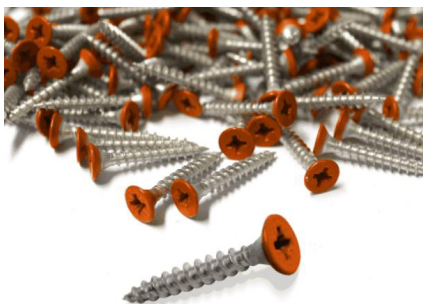

### For walls and ceilings:

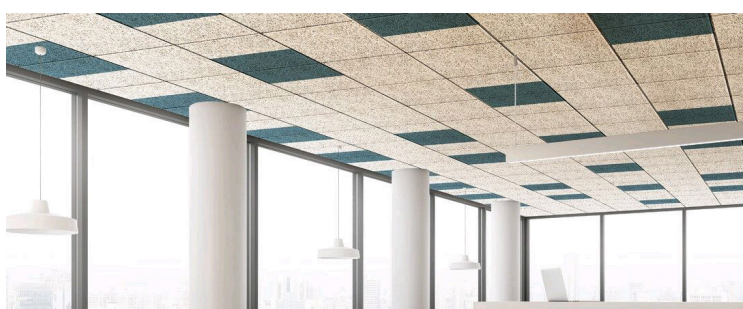

Absolute Office Comforts  
[info@aoffice.com.au](mailto:info@aoffice.com.au)  
 08 9201 1211